


# UNI FLOOR DRAIN INSTALLSTION INSTRUCTION

Includes:

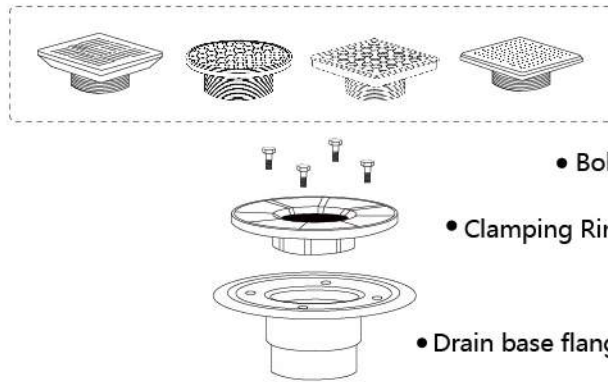


• Grating support & grating

• Bolts

• Clamping Ring

• Drain base flange


## Installation instruction

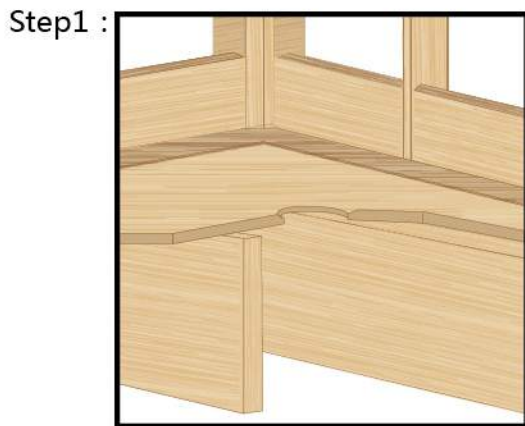


Cut a tapered hole into the floor. Make sure the area under the floor is clear for plumbing. Notice 2x6 boards between studs will surround the shower walls.



Screw the Drain Base Flange of the drain into the hole with 4 wood screws. The top surface of the drain base should be flush with the top of the wood floor.

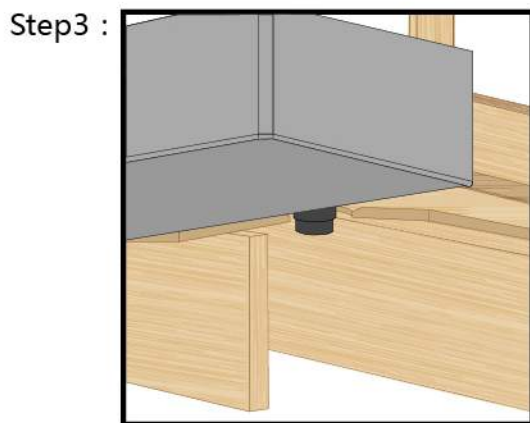


Lay rubber liner into shower area. Fold/tuck the vertical corners without cutting. Extend up the wall 6" and nail near top.

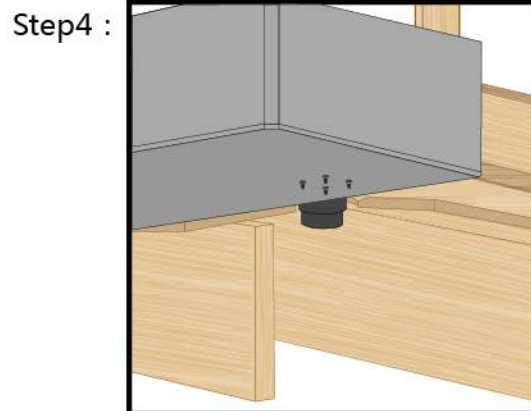

Using a sharp utility knife, cut a small slice into the rubber above the 4 holes where the 4 bolts will thread into. Push the bolts thru each slice and thread into drain base a few turns. In the center of the drain, slice an "X" into the rubber, no wider than about 2 inches.

Step5 :

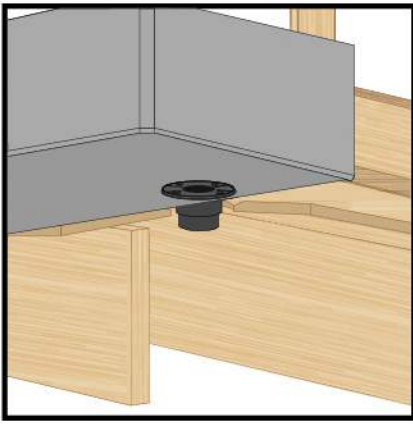


Place the clamping ring over the bolts and tighten the bolts. This will push the rubber liner in the center downward where you cut the "X" .

Step6 :




Adjust the height of grating support through threaded depending the thickness of tile and mortar. Place the drain body into the clamping ring and adjust it to the verification height.

Step7 :

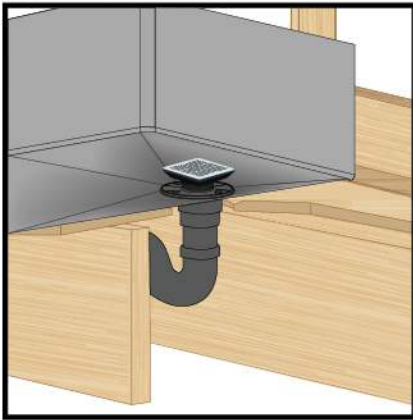

Mix the mortar and fill the shower pan area. Keep the mortar a "wet sand" consistency so it doesn't level. Pack it in & make it smooth. Ensure it slopes toward the drain in all directions. (slope: 1/2" rise for every 12" run). Keep about 3/8" of the lip of the linear drain above the surface of the mortar. Once you place the tiles, the top of the tile should be slightly above the lip of the drain.

Step8 :

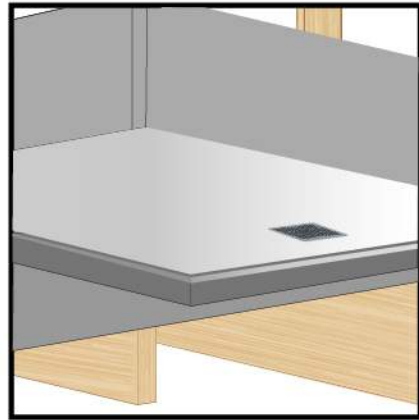

Place the drywall (green board) or cement board onto the walls. Leave about 3" gap from mortar base to the bottom of drywall. Coat the entire shower walls & corners with 3 coats of Regard sealant with paint roller & brush. Do not need to seal over the mortar base. Make sure to seal the bottom edges of the drywall.